


ALUMINIUM TWO BOLT CLEAT

suitable for cables 51 to 114mm in diameter
 can be used for all types of cable routes
 available in 10 sizes
 operating temperature -60 to +100°C
 plain finish - for indoor dry normal industrial use or outdoor unpolluted areas
 two-piece fixing design
 can be double stacked on common fixings

CABLE DIA		HEIGHT (B)	WIDTH (C)	DEPTH	WEIGHT g	BATT PART NUMBER
MIN	MAX					
51	57	68	98	49	230	90091
57	64	75	98	49	240	90057
64	70	84	135	64	410	90058
70	76	90	135	64	400	90092
76	83	96	140	64	410	90093
83	89	101	140	64	490	90368
89	95	114	152	76	650	90195

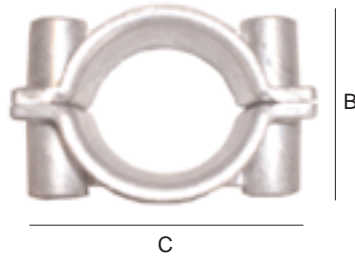

Method of fixing

In all applications the cleats should be mounted on suitable fixings

When mounting directly on unistrut or leprack type channel section an adapter plate should be used

battindustrial.sales@batt.co.uk