


## TWO BOLT CLEAT LSZH

low smoke and zero halogen  
 LUL approved  
 suitable for cables 50 to 94mm in diameter  
 7 sizes in range  
 sunlight (UV) and weather resistant  
 two piece, two fixing design  
 can be double stacked on common fixings  
 operating temperature -20 to +90°C

CABLE DIA		HEIGHT (B) MAX	WIDTH (C)	DEPTH	WEIGHT g	BATT PART NUMBER
MIN	MAX					
50	58	89	102	45	174	90353
56	64	93	102	45	158	90354
62	70	98	114	45	174	90355
68	76	104	114	50	210	90356
74	82	110	126	50	254	90357
80	88	118	126	50	264	
86	94	121	136	60	326	

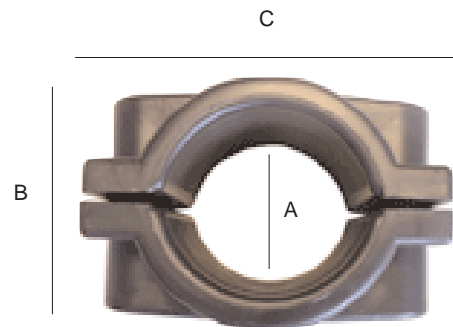

### Method of fixing

In all applications the cleats should be mounted on suitable M10 fixings

There is no need for any channel adaptor when mounting directly on to C section channel

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)