


2 Part 2 Bolt Polypropylene

Applications: 2 part 2 bolt polypropylene
Features: Polypropylene cable cleat
 46mm to 85mm in 6 sizes
 Sunlight (UV) and weather resistant
 Two piece and 2 hole design
 Elongated fixing holes to ease fitting
 Can be double stacked on common fixings
 Operating temperature -20°C to +90°C
 Black

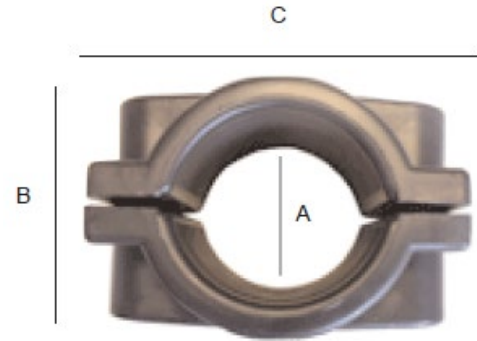

Method of fixing: In all applications the cleat should be mounted on suitable M10 fixings. There is no need for any channel adaptor when mounting directly on to C section channel.

Cable diameter		Height (B) max	Width (C)	Depth	Weight g	BATT Part No
Min	Max					
50	58	89	102	45	97	90201
56	64	93	102	45	98	90035
62	70	98	114	45	106	90225
68	76	104	114	50	132	90022
74	82	110	126	50	154	90131
80	88	118	126	50	160	-
86	94	121	136	60	204	-

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.