


TWO BOLT CLEAT

Black high-density polyethylene - unaffected by corrosive environments, oils & many chemicals
 suitable for cables 50 to 94mm in diameter
 7 sizes in range
 sunlight (UV) and weather resistant
 two piece, two fixing design
 can be double stacked on common fixings
 operating temperature -20 to +90°C

CABLE DIA		HEIGHT (B) MAX	WIDTH (C)	DEPTH	WEIGHT g	BATT PART NUMBER
MIN	MAX					
50	58	89	102	45	97	90201
56	64	93	102	45	98	90035
62	70	98	114	45	106	90225
68	76	104	114	50	132	90022
74	82	110	126	50	154	90131
80	88	118	126	50	160	
86	94	121	136	60	204	

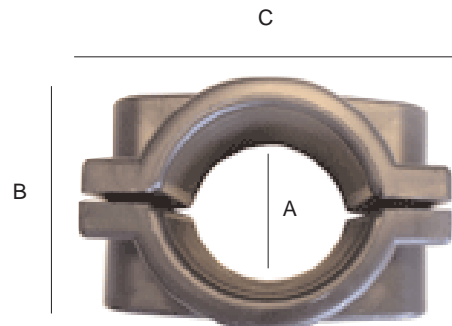

Method of fixing

In all applications the cleats should be mounted on suitable M10 fixings

There is no need for any channel adaptor when mounting directly on to C section channel

battindustrial.sales@batt.co.uk