




## 8163 Cable RS422

### CONSTRUCTION

Conductor	24 awg stranded tinned copper
Insulation	Polyethylene
Pair	3 twisted pairs, black & red, black & white, black & green
Shield	individually shielded aluminium-polyester foil, 100% coverage
Drain Wire	24awg stranded tinned copper
Braid	Tinned copper wire braid
Sheath	Grey PVC
	Overall diameter: 9.1+/- 0.20mm

BATT Part Number 91150

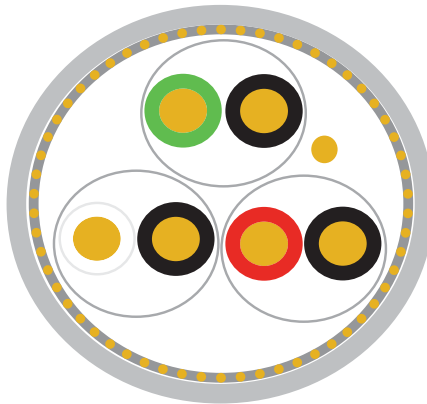

### CHARACTERISTICS

Nominal Capacitance	41 pF/m
Nominal Conductor DCR	78 Ohm/km

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Leeds: 0113 253 3565

Germany: +49 6131 6273874

Birmingham: 0121 313 2870

Manchester: 01204 793111

Italy: +39 2 89656 318

Bristol: 0117 966 6333

Peterborough: 01733 558485

Netherlands: + 31 186 622311

Cardiff: 02920 450044

Teesside: 01642 678633

Singapore: +65 6515 9348

Edinburgh: 0131 333 4400

Belgium: +32 15 20 65 72

Houston: + 1 713 590 1100

Erith: 01322 441165

Denmark: +45 3965 6650