


**1.--/ CONSTRUCTION**

Item	Description
1. Inner Conductor	1/0.584mm Copper Clad Steel
2. Insulation	3.71+/-0.10mm Solid PE
Foil	Without
3. Braid	16/7/0.12mm Bare Copper Wire(Coverage: Min.95%)
4. Jacket	6.20+/-0.15mm White/Black PVC

**2.--/ DESIGN**

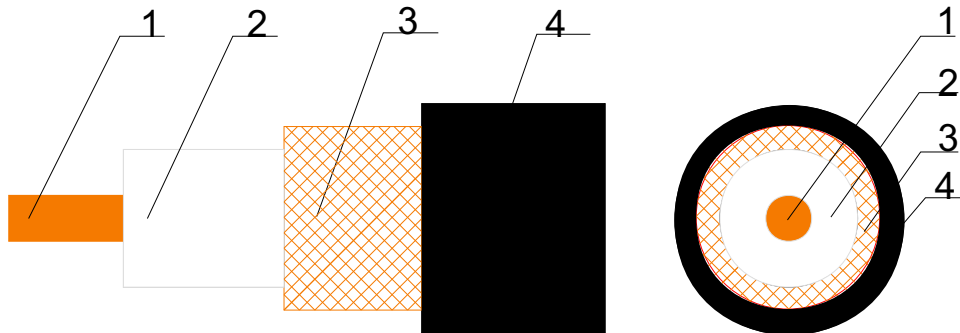

**3.--/ CHARACTERISTICS**

Impedance	75+/-3 Ohm	
Capacitance	67+/-3 pF/M	
Attenuation (20Degree C) dB/100M	5MHz	2.60
	10MHz	3.00
	50MHz	8.50
	100MHz	10.90
	200MHz	16.10
	300MHz	19.70
	470MHz	25.00
	600MHz	29.50
1000MHz	39.10	

**4.--/ PACKING**

Description	Size(Flange Dia. X Width)
100M Cardboard Reel with Tin Plated Steel Centre	255mm X 110mm
200M Plywood Drum packing	255mm X 220mm
250M Plywood Drum packing	255mm X 220mm
500M Plywood Drum packing	350mm X 280mm
1000M Plywood Drum packing	560mm X 220mm

**Aberdeen**  
Tel:01224 897979

**Birmingham**  
Tel: 0121 313 2870

**Bristol**  
Tel 0117 966 6333

**Cardiff**  
Tel: 02920 450044

**Copenhagen**  
Tel: +45 3965 6650

**Edinburgh**  
Tel: 0131 333 4400

**Houston**  
Tel: +1 713 590 1100

**Leeds**  
Tel: 0113 253 3565

**Mainz**  
Tel: +49 6131 6273874

**Manchester**  
Tel: 01204 793111

**Peterborough**  
Tel: 01733 558485

**Rotterdam**  
Tel: +31 186 622311

**Teesside**  
Tel: 01642 678633