




## 8723 SWA Cable

### CONSTRUCTION

Conductor	22 awg (7/0.254mm) stranded tinned copper
Insulation	Colour code:black, green, white & red polypropylene nominal thickness: 0.20mm
Pair	2 twisted pairs: black & red, green & white
Shield	Each pair individual longitudinal overlapped aluminium-polyester foil, 100% coverage
Drain Wire	24 awg (7/0.20mm) stranded tinned copper
Bedding	PVC
Armour	Steel Wire Armour
Sheath	Grey PVC, nominal thickness 0.51mm Overall diameter: 4.27+/- 0.20mm

BATT Part Number 91131

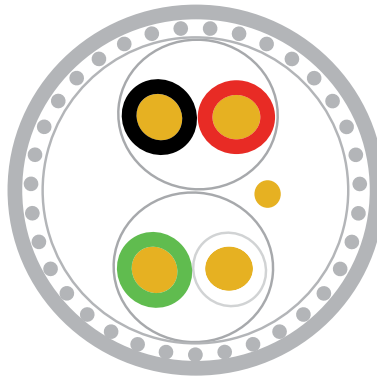

### CHARACTERISTICS

Nominal Capacitance	35.000 pF/ft
Nominal Conductor DCR	15.000 Ohm/1000ft
Nominal Velocity of Propagation	66.0%
Nominal Impedance	45.0 Ohms

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Leeds: 0113 253 3565

Germany: +49 6131 6273874

Birmingham: 0121 313 2870

Manchester: 01204 793111

Italy: +39 2 89656 318

Bristol: 0117 966 6333

Peterborough: 01733 558485

Netherlands: + 31 186 622311

Cardiff: 02920 450044

Teesside: 01642 678633

Singapore: +65 6515 9348

Edinburgh: 0131 333 4400

Belgium: +32 15 20 65 72

Houston: + 1 713 590 1100

Erith: 01322 441165

Denmark: +45 3965 6650