




8777 LSZH Cable

CONSTRUCTION

Conductor	22 awg (7/0.254mm) stranded tinned copper
Insulation	Colour code:black, red, black, white, black & green polypropylene nominal thickness: 0.254mm
Pair	3 twisted pairs, black & red, black & white, black & green
Shield	Each pair individual wrapped Overlapped aluminium-polyester foil, 100% coverage
Drain Wire	Each pair with 22 awg (7/0.254mm) stranded tinned copper
Sheath	Violet LSZH, nominal thickness 0.86mm Overall diameter: 6.93+/- 0.20mm
BATT Part Number	91281

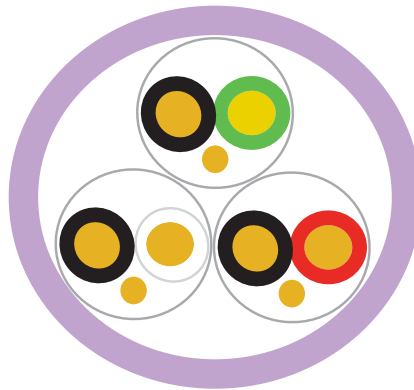

CHARACTERISTICS

Nominal Capacitance	30.000 pF/ft
Nominal Conductor DCR	15.000 Ohm/1000ft
Nominal Velocity of Propagation	66.0%
Nominal Impedance	50.0 Ohms

www.batt.co.uk

battindustrial.sales@batt.co.uk

Aberdeen: 01224 897979

Leeds: 0113 253 3565

Germany: +49 6131 6273874

Birmingham: 0121 313 2870

Manchester: 01204 793111

Italy: +39 2 89656 318

Bristol: 0117 966 6333

Peterborough: 01733 558485

Netherlands: + 31 186 622311

Cardiff: 02920 450044

Teesside: 01642 678633

Singapore: +65 6515 9348

Edinburgh: 0131 333 4400

Belgium: +32 15 20 65 72

Houston: + 1 713 590 1100

Erith: 01322 441165

Denmark: +45 3965 6650