




## 9696 Cable

### CONSTRUCTION

Conductor	22 awg solid bare copper
Insulation	Polyethylene
Pair	2 twisted pairs, blue & white with blue stripe, orange & white with orange stripe
Shield	Overall overlapped aluminium-polyester foil, 100% coverage
Braid	Tinned copper (58% coverage)
Drain Wire	22 awg solid tinned copper
Sheath	Black PVC
	Overall diameter: 7.36+/- 0.20mm

BATT Part Number 91073

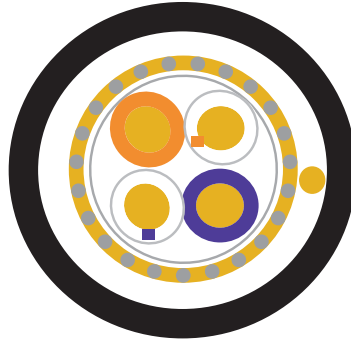

### CHARACTERISTICS

Nominal Capacitance	52.49 pF/m
Nominal Conductor DCR	46.59 Ohm/km
Nominal Velocity of Propagation	66.0%
Nominal Impedance	100.0 Ohms

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Leeds: 0113 253 3565

Germany: +49 6131 6273874

Birmingham: 0121 313 2870

Manchester: 01204 793111

Italy: +39 2 89656 318

Bristol: 0117 966 6333

Peterborough: 01733 558485

Netherlands: + 31 186 622311

Cardiff: 02920 450044

Teesside: 01642 678633

Singapore: +65 6515 9348

Edinburgh: 0131 333 4400

Belgium: +32 15 20 65 72

Houston: + 1 713 590 1100

Erith: 01322 441165

Denmark: +45 3965 6650