




## 9844 Cable Computer RS485 Cable

### CONSTRUCTION

Conductor	24awg (7/32) stranded tinned annealed copper
Insulation	Polyethylene
Core Colours	white/blue & blue/white, white/orange & orange/white, white/green & green/white, white/brown & brown/white
Pairs	4 pairs
Screen	overall aluminium mylar tape (100% coverage)
Braid	tinned copper wire braid (90% coverage)
Drain Wire	24awg stranded tinned copper
Sheath	PVC grey nominal overall diameter 9.9mm +/- 0.3mm
BATT Part Number	91473

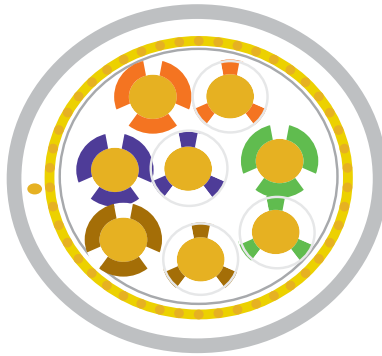

### CHARACTERISTICS

Capacitance (cond/cond)	41.9 pF/mtr
Capacitance (cond/scrn)	75.4 pF/mtr
Conductor Resistance	78.7 Ohm/km
Operating Temperature	-30 deg C to +80 deg C
Impedance	120 Ohms

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Leeds: 0113 253 3565

Germany: +49 6131 6273874

Birmingham: 0121 313 2870

Manchester: 01204 793111

Italy: +39 2 89656 318

Bristol: 0117 966 6333

Peterborough: 01733 558485

Netherlands: + 31 186 622311

Cardiff: 02920 450044

Teesside: 01642 678633

Singapore: +65 6515 9348

Edinburgh: 0131 333 4400

Belgium: +32 15 20 65 72

Houston: + 1 713 590 1100

Erith: 01322 441165

Denmark: +45 3965 6650