




9880 Cable

CONSTRUCTION

Inner Conductor	12awg solid bare copper
Insulation	6.17+/- 0.05mm foam PE
Tape	overall aluminium foil tape
Braid	tinned copper wire (coverage: 94%)
Tape	overall aluminium foil tape
Braid	tinned copper wire (coverage: 90%)
Sheath	10.28+/- 0.20mm yellow PVC

BATT Part Number 91114

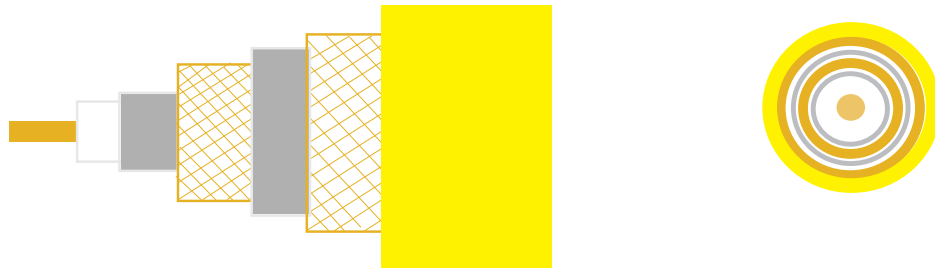

CHARACTERISTICS

Impedance:	50+/-3 Ohm
Capacitance	85+/-5 pF/M
Attenuation	100MHz 5.5 dB/100m
20 degree C	400MHz 12.7 dB/100m
	1000MHz 22.6 dB/100m
Velocity ratio	78%
Rated voltage	30V

www.batt.co.uk

battindustrial.sales@batt.co.uk

Aberdeen: 01224 897979

Erith: 01322 441165

Copenhagen: +45 3965 6650

Birmingham: 0121 313 2870

Leeds: 0113 253 3565

Houston: + 1 713 590 1100

Bristol: 0117 966 6333

Manchester: 01204 793111

Mainz: +49 6131 6273874

Cardiff: 02920 450044

Peterborough: 01733 558485

Rotterdam: + 31 186 622311

Edinburgh: 0131 333 4400

Teesside: 01642 678633

Milan: +39 289656 318

Singapore: +65 6515 9348

Antwerp: +32 1520 6572