




### A2 Brass Gland – Premium

- Application:** Brass gland for use indoor and outdoor with all types of unarmoured cable where it is essential to provide either an IP66 or an explosion proof seal (certified version) on the outer sheath. SOLO types are offered for installations requiring zero halogen, low smoke and fume glands
- Accessories:** As standard, all BATT glands come complete with earth tags, lock nuts and shrouds where required. SOLO types are supplied complete with LSF shroud, locknut and earth tag
- Standards / Approvals:** A2 BS6121: Part 1: 2005. BSEN50252  
 A2 – SOLO – BS6121 Part 1:2005  
 Ingress Protection: IP66, IP67, IP68  
 SOLO types are London Underground Ltd Approved  
 LUL – Approval Number R00131  
 Lloyds Approval Number: 01/00171  
 ABS Approval Number: 01-LD234401-PDA  
 SIRA Certificate Number: 99Y9151U  
 CSA Certificate Number: 1211841

Gland Size	Metric Thread 'C'	Min Thread Length 'D'	Cable diameter 'B'		Max across corners dia 'E'	BATT Part No A2	BATT Part No A2 SOLO
			Min	Max			
20/16	20	15	3.1	8.6	24.4	88347	88323
20s	20	10	6.1	11.6	26.5	88348	88662
20	20	10	6.5	13.9	30.0	88360	88663
25	25	10	11.1	19.9	39.9	88362	88756
32	32	10	17.0	26.2	45.5	88363	88757
40	40	15	22.0	32.1	55.4	88364	88666
50s	50	15	29.5	38.1	61.0	88365	88667
50	50	15	35.6	44.0	66.5	88285	88668
63s	63	15	40.1	49.9	77.6	88366	88669
63	63	15	47.2	55.9	83.2	88367	88670
75s	75	15	52.8	61.9	88.7	88368	88671
75	75	15	59.1	67.9	94.2	88369	88672

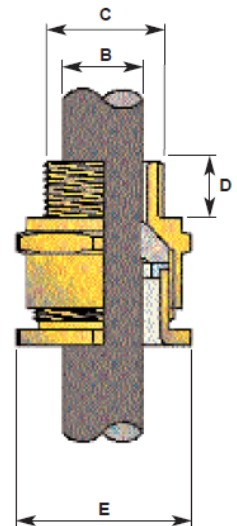

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.