


ALUMINIUM CLAW CLEAT

suitable for cables 10 to 51mm in diameter
 can be used for all types of cable routes
 available in 9 sizes
 operating temperature -60 to +100°C
 plain finish - for indoor dry normal industrial use or outdoor unpolluted areas
 two-piece single fixing design
 can be stacked to a maximum of 3 on one fixing

CABLE DIA		HEIGHT (B)	WIDTH (C)	DEPTH	WEIGHT g	SIZE	BATT PART NUMBER
MIN	MAX						
10	13	21	38	46	60	01	90514
13	16	21	38	46	50	02	90383
16	19	24	41	46	60	03	90186
19	22	27	44	46	70	04	90370
22	25	30	48	46	80	05	90071
25	32	37	54	46	90	06	90098
32	38	43	60	46	110	07	90100
38	44	49	67	46	120	08	90101
44	51	56	73	46	150	09	90102

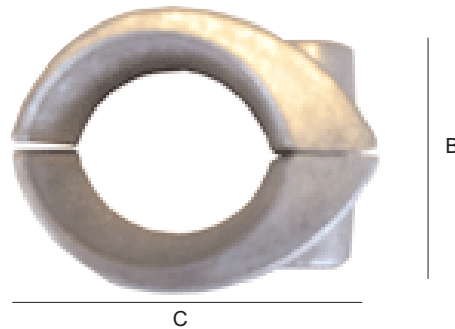

Method of fixing

In all applications the cleats should be mounted on suitable fixings

When mounting directly on unistrut or leprack type channel section an adapter plate should be used

When stacking claw cleats use a packing piece between the cleats

battindustrial.sales@batt.co.uk