
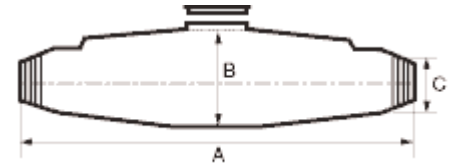


LOW VOLTAGE RESIN JOINTS

Straight Joints

BATT Part No.	Type	Dimensions (mm)			
		A	B	C min. max.	
90390	CM0 range	200	35	5	20
90391	CM1 range	250	45	8	30
90392	CM2 range	320	60	10	34
90393	CM3 range	450	75	30	48
90394	CM4 range	550	100	40	66
90395	CM5 range	660	140	50	85
90396	CM6 range	1290	140	45	95
90397	CM7 range	1345	155	70	105

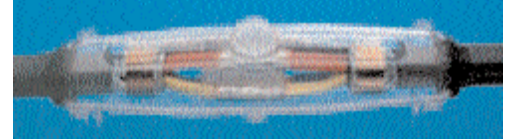



All supplied complete with mechanical connectors & resin

Selection Chart

CM0+C up to 4 core 1.5-6mm	CM4+C up to 4 core 95-120mm
CM1+C up to 4 core 10mm	CM5+C up to 4 core 150mm
CM2+C up to 4 core 16-25mm	CM6+C up to 4 core 185-240mm
CM3+C up to 4 core 35-70mm	CM7+C up to 4 core 300-400mm

Branch Joints

BATT Part No.	Type	Dimensions (mm)					
		A	B	C1 min. max.		C2 min. max.	
On request	CB1 range	335	110	10	20	10	20
On request	CB1.5 range	300	130	25	50	22	32
On request	CB2 range	420	125	10	32	10	32
On request	CB2.5 range	420	150	42	60	30	45
On request	CB3.5 range	500	150	57	65	34	50
90402	CBM1+C range	770	140		53		53
90403	CBM2+C range	910	170		60		60
90404	CBM3+C range	1010	200		73		73
On request	CPJ	160	92	10	25	10	20

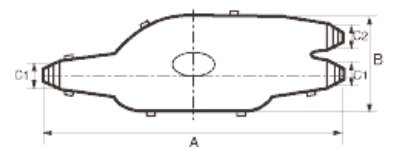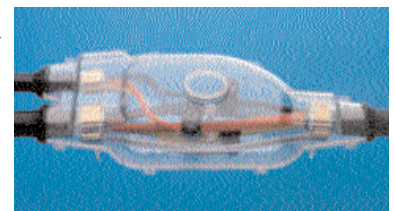

All supplied complete with mechanical connectors & resin

battindustrial.sales@batt.co.uk