

Claw Cleat - Aluminium

Applications:

Claw cleat, aluminium

Features:

Aluminium alloy claw cable cleat

10mm - 51mm diameter cables, 9 sizes available

Can be used on all types of cable routes

Two piece, single bolt fixing design

Can be stacked to a maximum of 3 on a common fixing

Plain finish for indoor dry normal industrial use or outdoor unpolluted areas

Operating temperature -60° to +100°C


Reference: 370BA

Method of fixing:

In all applications the cleats should be mounted on suitable fixings.

When mounting directly on unistrut or lepeach type channel section an adapter plate should be used.

When stacking claw cleats use a packing piece between cleats

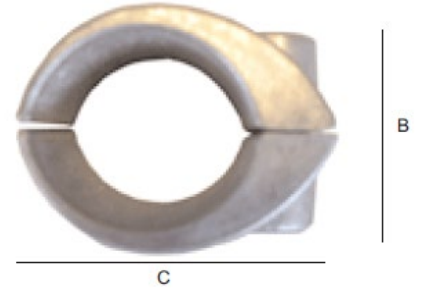

Size	Cable diameter		Height (B) max	Width (C)	Depth	Weight g	BATT Part No
	Min	Max					
1	10	13	21	38	46	60	90514
2	13	16	21	38	46	50	90383
3	16	19	24	41	46	60	90186
4	19	22	27	44	46	70	90370
5	22	25	30	48	46	80	90071
6	25	32	37	54	46	90	90098
7	32	38	43	60	46	110	90100
8	38	44	49	67	46	120	90101
9	44	51	56	73	46	150	90102

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.