





CT100 Cable

CONSTRUCTION

Inner Conductor	1/1.00mm bare copper
Insulation	4.6mm 5 cell air spaced PE
Foil	overlapped copper foil
Braid	16/4/0.12mm bare copper wire (coverage: 55%)
Sheath	6.65+/- 0.15mm black PVC

BATT Part Number Black 49033

BATT Part Number White 49155

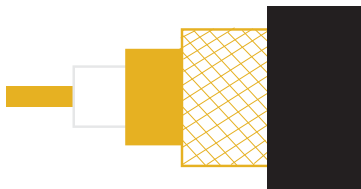

CHARACTERISTICS

Impedance:	75+/-3 Ohm
Capacitance	55+/-3 pF/M
Attenuation	5MHz 1.7 dB/100m
20 degree C	50MHz 5.60 dB/100m
	100MHz 8.00 dB/100m
	200MHz 11.40 dB/100m
	450MHz 17.6 dB/100m
	600MHz 20.30 dB/100m
	860MHz 24.60 dB/100m
	1000MHz 26.60 dB/100m

www.batt.co.uk

battindustrial.sales@batt.co.uk

Aberdeen: 01224 897979

Erith: 01322 441165

Copenhagen: +45 3965 6650

Birmingham: 0121 313 2870

Leeds: 0113 253 3565

Houston: + 1 713 590 1100

Bristol: 0117 966 6333

Manchester: 01204 793111

Mainz: +49 6131 6273874

Cardiff: 02920 450044

Peterborough: 01733 558485

Rotterdam: + 31 186 622311

Edinburgh: 0131 333 4400

Teesside: 01642 678633