





## CT167 Cable

### CONSTRUCTION

Inner Conductor	1/1.67mm bare copper
Insulation	7.28+/- 0.10mm 5 cell air spaced PE
Foil	overlapped copper foil
Braid	16/6/0.12mm bare copper wire (coverage: 55%)
Sheath	10.10+/- 0.20mm black PE
BATT Part Number	49173

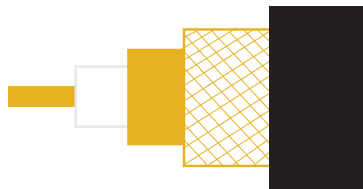

### CHARACTERISTICS

Impedance:	75+/-3 Ohm	
Capacitance	52+/-3 pF/M	
Attenuation	5MHz	0.90 dB/100m
20 degree C	10MHz	1.10dB/100m
	50MHz	2.50 dB/100m
	100MHz	3.60 dB/100m
	200MHz	5.10 dB/100m
	300MHz	7.10 dB/100m
	470MHz	8.20 dB/100m
	600MHz	9.50 dB/100m
	1000MHz	12.60 dB/100m

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Erith: 01322 441165

Copenhagen: +45 3965 6650

Birmingham: 0121 313 2870

Leeds: 0113 253 3565

Houston: + 1 713 590 1100

Bristol: 0117 966 6333

Manchester: 01204 793111

Mainz: +49 6131 6273874

Cardiff: 02920 450044

Peterborough: 01733 558485

Rotterdam: + 31 186 622311

Edinburgh: 0131 333 4400

Teesside: 01642 678633