





## CT75 Cable

### CONSTRUCTION

Inner Conductor	1/0.75mm bare copper
Insulation	3.40+/- 0.10mm 5 cell air spaced PE
Foil	overlapped copper foil
Braid	16/6/0.12mm bare copper wire (coverage: 60%)
Sheath	PVC, black

BATT Part Number 49104

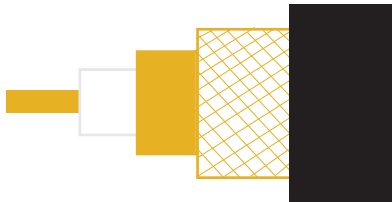

### CHARACTERISTICS

Impedance:	75+/-3 Ohm
Capacitance	52+/-3 pF/M
Attenuation 20 degree C	

50MHz	5.60 dB/100m
100MHz	8.0 dB/100m
200MHz	11.40 dB/100m
600MHz	20.30 dB/100m
1000MHz	26.60 dB/100m

[www.batt.co.uk](http://www.batt.co.uk)

[battindustrial.sales@batt.co.uk](mailto:battindustrial.sales@batt.co.uk)

Aberdeen: 01224 897979

Erith: 01322 441165

Copenhagen: +45 3965 6650

Birmingham: 0121 313 2870

Leeds: 0113 253 3565

Houston: + 1 713 590 1100

Bristol: 0117 966 6333

Manchester: 01204 793111

Mainz: +49 6131 6273874

Cardiff: 02920 450044

Peterborough: 01733 558485

Rotterdam: + 31 186 622311

Edinburgh: 0131 333 4400

Teesside: 01642 678633