





CT125 Cable

CONSTRUCTION

Inner Conductor	1/1.25mm bare copper
Insulation	5.50+/- 0.10mm 5 cell air spaced PE
Foil	overlapped copper foil
Braid	16/6/0.12mm bare copper wire (coverage: 60%)
Sheath	7.80+/- 0.20mm black PVC
BATT Part Number	49001

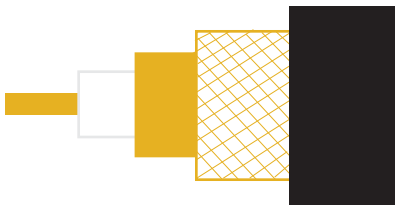

CHARACTERISTICS

Impedance:	75+/-3 Ohm
Capacitance	52+/-3 pF/M
Attenuation	5MHz 0.80 dB/100m
20 degree C	10MHz 1.20dB/100m
	50MHz 3.20 dB/100m
	100MHz 5.40 dB/100m
	200MHz 6.50 dB/100m
	300MHz 8.50 dB/100m
	470MHz 11.00 dB/100m
	600MHz 13.50 dB/100m
	1000MHz 16.40 dB/100m

www.batt.co.uk

battindustrial.sales@batt.co.uk

Aberdeen: 01224 897979

Erith: 01322 441165

Copenhagen: +45 3965 6650

Birmingham: 0121 313 2870

Leeds: 0113 253 3565

Houston: + 1 713 590 1100

Bristol: 0117 966 6333

Manchester: 01204 793111

Mainz: +49 6131 6273874

Cardiff: 02920 450044

Peterborough: 01733 558485

Rotterdam: + 31 186 622311