

Hook Cleat - Aluminium

Applications:

Hook cleat, aluminium

Features:

Aluminium alloy hook cable cleat

22mm - 76mm diameter cables, 9 sizes available

Without cap, supports cable during installation

Self-adjusting ranges

Can be used on all types of cable routes

Two piece, single fixing design

Can be double stacked on a common fixing

Plain finish for indoor dry normal industrial use or outdoor unpolluted areas


Operating temperature -60° to +100°C

Reference: 372AA

Method of fixing:

In all applications the cleats should be mounted on a suitable M10 fixings

When mounted directly on unistrut or leprack type channel section an adapter plate should be used.

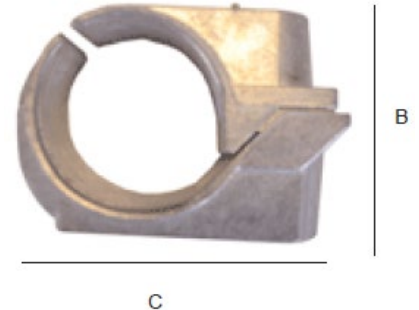

Cable diameter		Height (b)		Width (c)	Depth	Weight g	BATT Part No
Min	Max	Min	Max				
32	38	44	50	81	45	113	90360
38	44	50	57	88	45	142	90364
44	51	55	63	94	45	142	90361
51	57	64	72	103	45	191	90362
57	64	72	79	111	45	213	-
64	70	80	91	124	45	291	90216
70	76	91	96	132	45	326	90180

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.