



Features and Benefits

The Ofitel GAS approved Euromod Line Jack module is fully compatible with the Euromod wallplate range. Designed in accordance with BT specification D22150, the high quality contact and gas tight IDC connection combine to provide a robust low profile product that offers reduced installation costs and increased flexibility. A labelling facility is provided which is compatible with industry standard 6mm label tapes, for a neat and professional finish. The PBX mastered version contains the necessary bell ring capacitor required for this application.

- Robust low profile connector
- Shuttered
- Compatible with existing range of Euromod Modules and accessories
- PBX Mastered and Secondary versions

Technical Specification

Termination Tools

Molex and other industry standard installation tools

IDC Terminations

Suitable for 0.4mm - 0.6mm solid or stranded cable, maximum o.d. 1.5mm. Two wires may be terminated for daisy chain applications.

Patents Pending on connector and module designs

Mechanical Jack Connector

Operating Life : Minimum 1000 insertion cycles
 Contact Material : Phosphor Bronze
 Contact Plating : 1.25 micrometers Au/Ni
 Material : UL94-V0 Thermoplastic


IDC Connector

Operating Life : Minimum 100 Reterminations
 Contact Material : Phosphor Bronze
 Contact Plating : Sn/Pb over Ni
 Wire Size : 2 x 24 - 26 AWG solid or stranded

Electrical

D.C. Resistance
 (through 75mm of cordage) : < 100mΩ
 Insulation Resistance : > 100MΩ
 Working Voltage : 200 Vdc
 Working Current : 250 mA dc (continuous)

Backbox Depth Requirements : 16mm Secondary
 25mm Mastered

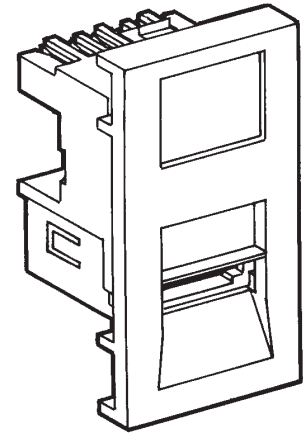

Order No.	Description
17.10.012.A0012	Euromod Line Jack LJLP Module (Secondary) - Colour White
17.10.012.A0022	Euromod Line Jack LJLP Module (Mastered) - Colour White

Molex Premise Networks standard colour is white. Other colours are available subject to minimum order quantities.



England & Wales: **01322 441169**

Scotland & N. Ireland: **0131 333 4411**

Email: **battnetworks.sales@batt.co.uk**

www.batt.co.uk