

## FEATURES AND SPECIFICATIONS

### Features and Benefits


The ISDN Bus Panel is designed to act as a work group concentrator for up to eight ISDN devices per channel. Each eight port "harmonica" will support a total of 450 metres of cabling. No special wall outlets are required as the panel handles the necessary S Bus termination. Please note that although the standard pin-out for ISDN is the EIA preferred schedule T568A, this panel will accommodate both T568A and T568B wiring.

The ISDN Bus Panel has been independently tested by KTL, Hull U.K.

- Standard 19" Rack Mounting
- Supports 3 ISDN NT2's giving 3 groups of 8 ISDN Ports
- RJ45 "IN" Ports for Direct Connection to NT2
- In-built resistors provide correct Bus termination

### Technical Information

Density:	24 Ports per 1U
RJ45 Connector:	Body material UL94 V0 thermoplastic, suitable for at least 500 mating cycles.

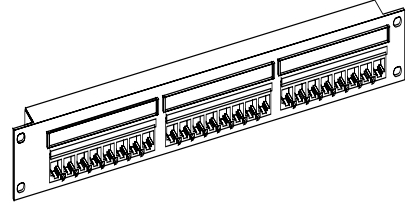

Order No.	Description
27.00.240.A001G	ISDN Bus Panel 24 Channel



England & Wales: **01322 441169**

Scotland & N. Ireland: **0131 333 4411**

Email: [battnetworks.sales@batt.co.uk](mailto:battnetworks.sales@batt.co.uk)

[www.batt.co.uk](http://www.batt.co.uk)