




## NYY Cable 600/1000V

Plain annealed copper conductors, PVC insulated / PVC sheathed, black 1000 volts

- Applications:** Energy cables for use in open air, underground, indoors and in cable ducts
- Conductor stranding:** Re: circular solid  
Rm: circular stranded  
Sm: sectorial stranded
- Conductor identification:**
- NYY-O Single core: Black  
Two core: Brown and Blue
- NYY-J Three core: Brown, Blue and Green / Yellow  
Four core: Black, Grey, Brown and Green / Yellow  
Five core: Black, Blue, Brown, Grey and Green / Yellow  
Seven – Forty cores: Black cores, numbered and Green / Yellow

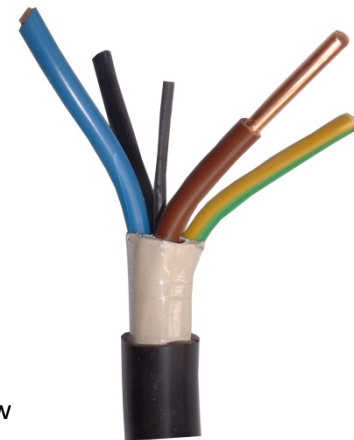

Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-O
6	Re	1	9.0	125	16946
10	Re	1	10.0	168	16944
16	Re	1	11.0	230	16945
25	Rm	1	12.5	370	16837
35	Rm	1	13.5	490	16838
50	Rm	1	15.5	640	16839
70	Rm	1	17.0	830	16840
95	Rm	1	19.0	1110	16100
120	Rm	1	20.5	1350	16905
150	Rm	1	22.5	1650	16904
185	Rm	1	24.5	2040	16211
240	Rm	1	27.5	2610	16903
300	Rm	1	30.5	3300	16813
400	Rm	1	33.5	4200	-
500	Rm	1	38.0	5160	16984
630	Rm	1	-	-	-

Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-O
1.5	Re	2	11.5	190	16663
2.5	Re	2	12.5	230	16502
4	Re	2	14.0	310	-
6	Re	2	15.0	370	16722
10	Re	2	16.5	500	-
16	Re	2	18.5	660	-
25	Rm	2	22.0	1000	-
35	Rm	2	25.0	1300	-
50	Rm	2	28.0	1700	-
70	-	2	-	-	-
95	-	2	-	-	-

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.



Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-J
1.5	Re	3	12.0	210	16503
2.5	Re	3	13.0	260	16504
4	Re	3	14.5	360	16597
6	Re	3	16.0	440	16591
10	Re	3	17.5	600	16683
16	Re	3	19.5	820	16714
25	Rm	3	23.5	1250	16616
35	Rm	3	26.5	1640	16773
50	Rm	3	30.0	2160	16841
70	Sm	3	30.0	2450	16675
95	Sm	3	34.0	3330	16380

Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-J
1.5	Re	4	13.0	250	16595
2.5	Re	4	14.0	310	16676
4	Re	4	15.5	420	16709
6	Re	4	17.0	530	16729
10	Re	4	19.0	730	16731
16	Re	4	21.5	1030	16752
25	Rm	4	25.5	1550	16500
35	Rm	4	28.5	2050	16501
50	Rm	4	33.0	2740	16696
70	Sm	4	34.5	3220	16596
95	Sm	4	39.0	4390	16629
120	Sm	4	42.5	5380	-
150	Sm	4	48.0	6580	-
185	Sm	4	52.5	8220	16630
240	Sm	4	60.0	10570	-
300	Sm	4	68.0	13250	-

Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-J
1.5	Re	5	13.5	290	16605
2.5	Re	5	15.0	360	16505
4	Re	5	17.0	500	16685
6	Re	5	19.5	640	16672
10	Re	5	20.5	880	16692
16	Re	5	23.0	1220	16686
25	Re	5	28.8	1961	16325

Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-J
1.5	Re	7	14.5	340	16193
2.5	Re	7	15	372	16161
4	Re	7	18	541	16226
6	Re	7	-	-	-
10	Re	7	-	-	-
16	Re	7	-	-	-

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.



Size Sq.mm	Conductor type	Number of cores	Nominal overall diameter mm	Weight kg/km	BATT part no. NYY-J
1.5	Re	12	17.5	400	16308
2.5	Re	12	19.5	560	16244
1.5	Re	19	20.0	590	16228
2.5	Re	19	22.0	800	-
1.5	Re	27	23.5	790	-
2.5	Re	27	26.0	1090	-
1.5	Re	37	26.0	1030	-
2.5	Re	37	29.0	1450	-
1.5	Re	40	27.5	1110	16338
2.5	Re	40	30.5	1570	16339

Whilst BATT CABLES plc endeavours to ensure the information on the website, specification sheets and all other technical information is accurate, the information is for guidance only and it is subject to change without notice or liability. Batt Cables Plc is not responsible for the consequences of any inadequacies, inaccuracies or other deficiencies contained therein. When selecting cable accessories, please note that the actual cable dimensions may vary due to manufacturing tolerances.