


ALUMINIUM HOOK CLEAT

suitable for cables 25 to 76mm in diameter
 without cap, supports cables in position during installation
 available in 8 sizes
 operating temperature -60 to +850°C
 self adjusting ranges
 two-piece single fixing design
 suitable for indoor dry normal industrial use or outdoor normal unpolluted areas
 not designed to secure cables in long vertical routes

CABLE DIA		HEIGHT (B)		WIDTH (C)	DEPTH	WEIGHT g	BATT PART NUMBER
MIN	MAX	MIN	MAX				
32	38	44	50	81	45	113	90360
38	44	50	57	88	45	142	90364
44	51	55	63	94	45	142	90361
51	57	64	72	103	45	191	90362
57	64	72	79	111	45	213	
64	70	80	91	124	45	291	90216
70	76	91	96	132	45	326	90180

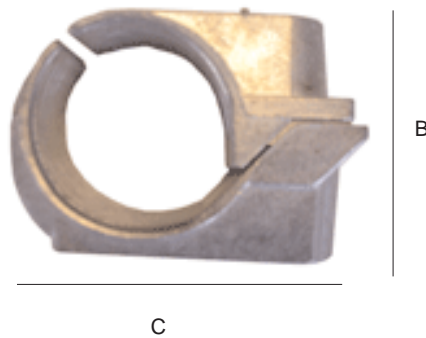

Method of fixing

In all applications the cleats should be mounted on suitable M10 fixings

When mounting directly on unistrut or leprack type channel section an adapter plate should be used

battindustrial.sales@batt.co.uk