




Split Concentric Cable BS7870

Solid annealed stranded copper conductor, PVC insulated surrounded by a concentric layer of plain annealed solid copper neutral conductors.

Applications:	As recommended by local regulations
Sheath	PVC
Colour:	Black
No of cores:	1
Core colour	Brown
BS 7870-3.50.2005:	LV and MV polymeric insulated cables for use by distribution and generation utilities. Specification for distribution cables of rated voltage 0.6/1 kV. PVC insulated split concentric cables with copper or aluminium conductors. (implementation of HD 603)

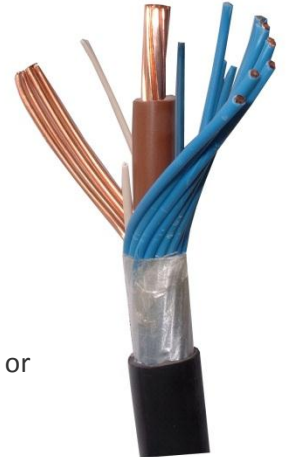

Size mm	Conductor stranding	Overall diameter mm	Weight kg/km	BATT part no
4	7 / 0.85		151	16530
6	7 / 1.04	9.3	185	16776
10	7 / 1.35	11	280	16757
16	7 / 1.7	12.10	397	16531
25	11 / 1.7	14.4	596	16532
35	15 / 1.7	16.0	789	16756