

TREFOIL ALUMINIUM TWO BOLT CLEAT

aluminium alloy

suitable for cables 24 to 76mm in diameter in trefoil groups in 33 sizes

can be used for all types of cable routes


supplied complete with top fastening

operating temperature -60 to +100°C

suitable for use at a maximum fault level of 30kA rms

recommended maximum spacings, straight runs 900mm, vertical bends 300mm and horizontal bends on each support with, if necessary, intermediate unanchored cleats to limit restraint spacing to 300mm

CABLE DIA		HEIGHT (B)	WIDTH (C)	DEPTH	WEIGHT g	DISTANCE BETWEEN BOLTS (E) MM	BATT PART NUMBER
MIN	MAX						
25	27	97	128	38	284	102	
27	28	100	128	38	291	102	
28	30	103	130	38	298	104	
30	32	105	133	38	305	107	
32	34	106	135	38	312	109	90146
34	35	109	137	38	319	110	
35	36	113	138	38	326	113	
36	38	116	140	38	333	114	90158
38	40	119	145	38	340	118	
40	41	122	147	38	347	121	
41	43	124	149	38	354	123	
43	44	127	150	38	369	124	
44	46	130	154	38	383	128	
46	48	133	156	38	390	129	
48	49	137	159	38	397	133	
49	51	140	165	38	404	135	
51	53	143	165	38	411	137	
53	54	143	172	38	418	141	
54	55.5	155	183	44	560	152	
55.5	57	158	187	44	574	155	
57	59	160	189	44	588	157	
59	60	163	191	44	602	160	
60	62	165	194	44	617	162	

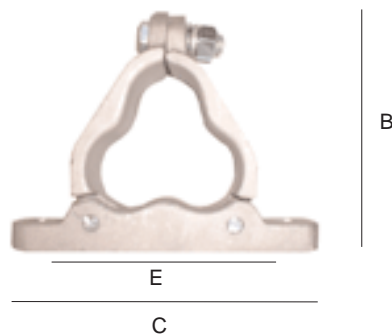

Method of fixing

In all applications the cleats should be mounted on suitable M10 fixings

It is essential that they are secured to supports capable of withstanding the prospective short circuit forces

battindustrial.sales@batt.co.uk